

FRIGIDAIRE®

FRIGIDAIRE

Delivering
Comfort

WITH THE **FSA4BE SERIES** OF AIR CONDITIONERS

Table of Contents

2 CONTRACTOR SUPPORT

3 PRODUCT FEATURES & BENEFITS

4 TECHNICAL SPECIFICATIONS

- MODEL ID CODES
- AIR CONDITIONER OUTDOOR SECTION DIMENSIONS
- AIR DISCHARGE ALLOWS ADEQUATE CLEARANCE FOR AIRFLOW

5 PHYSICAL AND ELECTRICAL SPECIFICATIONS/OUTDOOR UNITS AND ACCESSORIES

6 SYSTEM COOLING CAPACITIES

7 COOLING EXPANDED RATINGS WITH COIL





THE FRIGIDAIRE®

TOTAL PACKAGE™

Designed with contractors in mind. Frigidaire HVAC equipment is designed with the contractor in mind. Each unit is equipped with features designed to make them easier to install and service, reducing time spent on each job while ensuring peak performance and safety.



EASY TO
Service



EASY TO
Install



FSA4BE Series

Essentials Series Air Conditioner | Up to 14.3 SEER2 Residential System | 1 1/2 - 5 Ton Capacity

The FSA4BE Series of air conditioners offers exceptional performance.

The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.

Easy to

Service

Easy to

Install

① REMOVABLE SIDE PANELS

Side panels can be easily removed and replaced without removing the top grill.

② EASY TO CLEAN COIL

All aluminum coils provide high corrosion resistance. Innovative design decreases unit weight and refrigerant requirements.

③ GALVANIZED STEEL EXTERIOR

Powder-coated paint and gloss finish eliminates sharp edges and reduces scratching.

④ QR CODES

QR codes on each unit link directly to the product's technical literature, eliminating the need to search for relevant documentation when working on the unit.


⑤ INCLUDED FILTER DRIER

Liquid line filter drier included with unit, field installed.

⑥ LONG WIRING LEADS

Allows easy component changeout.


MODEL ID CODES

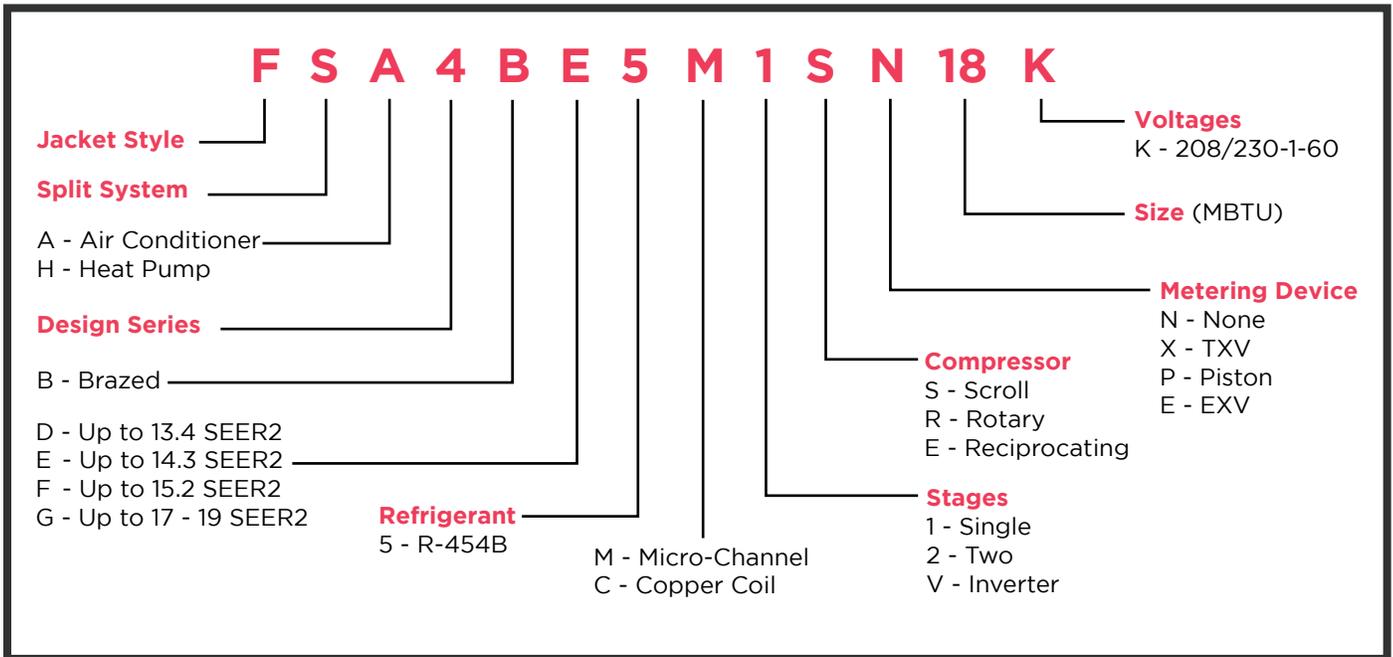

AIR CONDITIONER OUTDOOR SECTION DIMENSIONS

FSA4BE	18K	24K	30K	36K	42K	48K	60K
H	32.5	29	29	41	37	45	45
W	23.75	31.75	31.75	31.75	31.75	31.75	31.75
D	23.75	31.75	31.75	31.75	31.75	31.75	31.75

**AIR DISCHARGE ALLOWS
ADEQUATE CLEARANCE
FOR AIR FLOW**

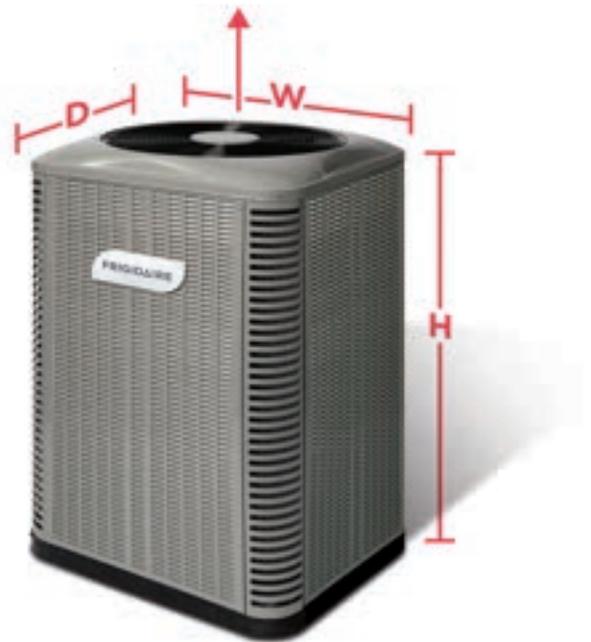

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

Up to 14.3 SEER2 – High Efficiency – Single Phase

Model Number FSA4BE		18K	24K	30K	36K	42K	48K	60K	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1							
	Delay Fuse Maximum (2)	15	20	25	30	30	40	50	
	Minimum Circuit Ampacity	11.1	13.7	16.8	17.9	19.9	23.1	32.2	
Component Data	Fan Motor	HP	1/10	1/8	1/8	1/5	1/4	1/4	1/3
	Compressor Data	LRA	41.5	60.2	75.6	82.5	109.0	126.0	157.0
Refrigerant suction line O.D. NOTE: Liquid line is 3/8" O.D. for entire length.		0-24 ft.	5/8" (3)	5/8" (3)	3/4"	3/4"	7/8"	7/8"	7/8"
		25-39 ft.	5/8" (3)	3/4"	3/4"	3/4"	7/8"	7/8"	1-1/8" (5)
		40-75 ft.	5/8" (3)	3/4"	3/4"	7/8" (4)	7/8"	7/8"	1-1/8" (5)
Approximate Shipping Weight (lbs.)			140	161	164	195	212	227	238
Sound Rating dBA			70	70	70	71	76	77	76

Rated for 10,000 ft maximum elevation.

- (1) Operating Voltage Range: 187v min. - 253v max.
- (2) HACR Type Circuit Breakers may be used.
- (3) Requires 3/4" to 5/8" reducer from line to unit.
- (4) Requires 7/8" to 3/4" reducer from line to unit.
- (5) Requires 7/8" to 1-1/8" reducer from line to unit.

ACCESSORIES

Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

High Wind Tie-Down Kits - <http://miamitech.com/products/metal/cutdnortek.html>

Low Ambient Kit - 918837

Cantilever Mounting Kit - 1018671

Four mounting corner post/panel split system design to cantilever mounts.

SYSTEM COOLING CAPACITIES

Up to 14.3 SEER2 – High Efficiency – Single Phase

Outdoor Unit	Indoor Unit	BTUH	SEER2	EER2	CFM
FSA4BE5M1SN18K	C75B(A,H)MX24C-A	17,400	14.3	11.7	595
FSA4BE5M1SN18K	C75B(A,H)MX24C-B	17,400	14.3	11.7	595
FSA4BE5M1SN24K	C75B(A,H)MX24C-A	23,600	14.3	11.7	800
FSA4BE5M1SN24K	C75B(A,H)MX24C-B	23,600	14.3	11.7	800
FSA4BE5M1SN30K	C75B(A,H)MX30C-A	28,600	14.3	11.7	955
FSA4BE5M1SN30K	C75B(A,H)MX30C-B	28,600	14.3	11.7	955
FSA4BE5M1SN30K	C75B(A,H)MX30C-C	28,600	14.3	11.7	955
FSA4BE5M1SN36K	C75B(A,H)MX36C-B	34,800	14.3	11.7	1,050
FSA4BE5M1SN36K	C75B(A,H)MX3642C-C	34,800	14.3	11.7	1,050
FSA4BE5M1SN42K	C75B(A,H)MX3642C-C	40,500	14.3	11.7	1,400
FSA4BE5M1SN48K	C75B(A,H)MX4860C-C	46,000	13.8	11.2	1,500
FSA4BE5M1SN48K	C75B(A,H)MX4860C-D	46,000	13.8	11.2	1,500
FSA4BE5M1SN60K	C75B(A,H)MX4860C-C	55,500	13.8	11.2	1,545
FSA4BE5M1SN60K	C75B(A,H)MX4860C-D	55,500	13.8	11.2	1,545

See current AHRI Directory for certified combinations and ratings. All ratings are with time delay relay.

www.ahridirectory.org

COOLING EXPANDED RATINGS WITH COIL

FSA4BE5M1SN18K + C75B(A,H)MX24(C,U)-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
525	80	62	18.4	15.2	1.05	17.6	14.5	1.16	16.9	14.1	1.29	16.1	13.7	1.44	15.2	13.2	1.61	14.3	13.0	1.81
	80	67	20.1	12.8	1.04	19.3	12.4	1.15	18.5	12.1	1.28	17.7	11.7	1.43	16.8	11.3	1.60	15.8	10.9	1.80
	80	72	22.0	10.5	1.03	21.1	10.2	1.14	20.4	9.9	1.27	19.5	9.5	1.42	18.6	9.2	1.60	17.5	8.8	1.80
	75	62	18.4	12.9	1.05	17.6	12.5	1.16	16.8	12.1	1.29	16.0	11.7	1.44	15.2	11.3	1.61	14.2	10.7	1.81
	75	67	20.0	10.6	1.04	19.2	10.2	1.15	18.5	9.9	1.28	17.6	9.5	1.43	16.7	9.1	1.60	15.7	8.7	1.80
595	80	62	18.9	16.1	1.08	18.0	15.5	1.19	17.2	15.3	1.32	16.4	14.8	1.47	15.5	14.2	1.64	14.6	13.9	1.83
	80	67	20.5	13.4	1.07	19.7	13.0	1.18	18.9	12.7	1.31	18.0	12.3	1.45	17.1	11.9	1.63	16.0	11.4	1.83
	80	72	22.4	10.9	1.06	21.5	10.5	1.17	20.7	10.2	1.30	19.9	9.9	1.45	18.9	9.5	1.62	17.8	9.1	1.83
	75	62	18.7	13.5	1.08	17.9	13.1	1.19	17.1	12.7	1.32	16.3	12.3	1.46	15.4	11.9	1.64	14.4	11.2	1.83
	75	67	20.4	10.9	1.07	19.6	10.5	1.18	18.8	10.2	1.31	18.0	9.8	1.45	17.0	9.5	1.63	16.0	9.0	1.82
675	80	62	19.2	17.0	1.11	18.3	16.6	1.22	17.5	15.5	1.35	16.7	15.5	1.50	15.8	15.3	1.67	14.8	14.7	1.86
	80	67	20.9	14.0	1.10	20.0	13.6	1.21	19.2	13.3	1.34	18.3	13.0	1.49	17.4	12.5	1.66	16.3	12.1	1.86
	80	72	22.8	11.2	1.09	21.9	10.9	1.20	21.1	10.5	1.33	20.2	10.2	1.48	19.2	9.9	1.66	18.1	9.4	1.86
	75	62	19.1	14.0	1.11	18.2	13.7	1.22	17.4	13.3	1.35	16.6	12.9	1.50	15.6	12.2	1.67	14.6	11.7	1.87
	75	67	21.1	11.3	1.10	19.9	10.9	1.21	19.1	10.6	1.34	18.3	10.2	1.49	17.3	9.8	1.66	16.2	9.3	1.86

FSA4BE5M1SN24K + C75B(A,H)MX24(C,U)-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
700	80	62	24.7	20.1	1.40	23.6	19.6	1.52	22.4	19.0	1.68	21.3	18.5	1.87	20.1	17.8	2.08	18.8	17.3	2.29
	80	67	27.1	17.2	1.38	25.9	16.6	1.51	24.7	16.1	1.67	23.4	15.5	1.87	22.1	14.9	2.08	20.7	14.3	2.29
	80	72	29.4	14.0	1.36	28.2	13.5	1.50	27.0	13.0	1.66	25.5	12.4	1.85	24.3	12.0	2.06	22.7	11.3	2.27
	75	62	24.6	17.2	1.40	23.5	16.6	1.52	22.4	16.1	1.68	21.2	15.5	1.87	20.0	14.9	2.08	18.7	14.3	2.29
	75	67	27.0	14.2	1.38	25.8	13.6	1.51	24.6	13.1	1.67	23.4	12.5	1.87	22.0	12.0	2.08	20.6	11.4	2.29
800	80	62	25.3	21.3	1.44	24.1	20.7	1.57	22.9	20.1	1.73	21.7	19.5	1.91	20.5	19.0	2.12	19.1	18.4	2.33
	80	67	27.7	18.0	1.42	26.4	17.4	1.55	25.2	16.9	1.72	23.9	16.3	1.91	22.6	15.7	2.12	21.1	15.1	2.33
	80	72	30.1	14.5	1.40	28.8	14.0	1.54	27.5	13.5	1.70	26.2	13.0	1.89	24.7	12.4	2.10	23.1	11.8	2.31
	75	62	25.2	18.0	1.44	24.0	17.4	1.57	22.8	16.9	1.73	21.6	16.3	1.91	20.4	15.7	2.12	19.0	15.1	2.33
	75	67	27.6	14.7	1.42	26.4	14.1	1.55	25.1	13.6	1.72	23.8	13.1	1.91	22.5	12.4	2.12	21.0	11.8	2.33
900	80	62	25.8	22.4	1.48	24.6	21.7	1.61	23.3	21.3	1.77	22.1	20.7	1.95	20.8	20.1	2.16	19.5	19.3	2.37
	80	67	28.2	18.8	1.46	26.9	18.2	1.60	25.6	17.6	1.76	24.3	17.0	1.95	22.9	16.4	2.16	21.3	15.8	2.37
	80	72	30.6	15.0	1.44	29.3	14.4	1.58	27.9	13.9	1.74	26.6	13.4	1.93	24.9	12.7	2.14	23.4	12.2	2.36
	75	62	25.7	18.8	1.48	24.4	18.2	1.61	23.2	17.6	1.77	22.0	17.0	1.96	20.7	16.4	2.16	19.2	15.8	2.37
	75	67	28.1	15.1	1.46	26.8	14.6	1.60	25.5	14.0	1.76	24.2	13.4	1.95	22.8	12.8	2.16	21.1	12.1	2.37

E.D.B. = Entering dry bulb
 E.W.B. = Entering wet bulb
 T.C. = Total Capacity
 S.C. = Sensible Capacity
 kW = Kilo Watts

COOLING EXPANDED RATINGS WITH COIL (CONTINUED)

FSA4BE5M1SN30K + C75B(A,H)MX30(C,U)-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
875	80	62	30.6	25.2	1.79	29.2	24.6	1.93	27.9	24.0	2.11	26.7	23.5	2.33	25.2	22.5	2.55	23.1	21.8	2.78
	80	67	33.3	21.3	1.76	31.9	20.6	1.92	30.6	20.1	2.11	29.3	19.5	2.34	27.8	18.8	2.56	25.4	17.7	2.79
	80	72	35.7	17.1	1.75	34.3	16.5	1.91	32.9	16.0	2.10	31.7	15.5	2.32	30.2	15.0	2.55	27.8	14.0	2.79
	75	62	30.6	21.5	1.79	29.2	20.9	1.93	27.8	20.2	2.11	26.6	19.5	2.33	25.1	18.8	2.55	23.1	17.7	2.77
	75	67	33.2	17.6	1.76	31.7	16.9	1.92	30.6	16.4	2.11	29.0	15.7	2.33	27.7	15.1	2.56	25.5	14.1	2.79
955	80	62	31.1	26.1	1.83	29.4	24.6	1.96	28.3	25.1	2.15	27.0	24.1	2.36	25.4	23.7	2.59	23.4	22.6	2.82
	80	67	33.8	21.9	1.79	32.3	21.3	1.96	31.1	20.8	2.15	29.7	20.2	2.37	28.1	19.5	2.60	25.7	18.3	2.82
	80	72	36.3	17.5	1.79	34.6	16.9	1.95	33.5	16.5	2.14	32.2	16.0	2.35	30.5	15.3	2.59	28.1	14.3	2.83
	75	62	31.1	22.2	1.83	29.3	21.1	1.96	28.2	20.9	2.15	26.9	20.1	2.36	25.4	19.4	2.58	23.3	18.3	2.81
	75	67	33.7	18.0	1.79	32.2	17.3	1.96	31.0	16.8	2.15	29.4	16.1	2.37	28.0	15.5	2.60	25.7	14.5	2.82
1125	80	62	31.9	27.9	1.90	30.4	27.6	2.04	28.9	27.0	2.23	27.6	26.3	2.44	26.0	25.4	2.66	24.1	24.1	2.90
	80	67	34.6	23.3	1.87	33.1	22.6	2.04	31.7	22.1	2.23	30.3	21.4	2.45	28.7	20.7	2.68	26.3	19.7	2.90
	80	72	37.1	18.3	1.86	35.5	17.7	2.03	34.1	17.1	2.21	32.8	16.6	2.43	31.1	16.0	2.66	28.4	15.0	2.91
	75	62	31.9	23.5	1.90	30.1	22.3	2.04	28.9	22.3	2.23	27.5	21.4	2.44	25.9	20.7	2.66	23.7	19.6	2.89
	75	67	34.5	18.8	1.87	32.9	18.1	2.04	31.6	17.6	2.23	30.2	16.9	2.44	28.5	16.1	2.67	26.1	15.1	2.90

FSA4BE5M1SN36K + C75B(A,H)MX36(C,U)-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1050	80	62	36.6	31.5	2.04	35.3	31.2	2.26	34.0	30.7	2.50	32.5	30.0	2.75	30.9	28.7	3.02	28.7	27.9	3.30
	80	67	39.4	26.1	2.01	38.1	25.5	2.25	36.9	24.8	2.49	35.4	24.2	2.76	33.7	23.5	3.03	31.4	22.6	3.31
	80	72	42.0	20.6	1.98	40.8	20.1	2.23	39.6	19.6	2.48	38.2	19.1	2.75	36.3	18.4	3.03	33.8	17.5	3.32
	75	62	36.6	26.7	2.04	35.2	26.1	2.26	33.9	25.5	2.49	32.4	24.8	2.74	30.7	23.5	3.01	28.6	22.6	3.29
	75	67	39.2	21.2	2.01	38.0	20.7	2.25	36.7	20.1	2.49	35.0	19.3	2.75	33.4	18.6	3.03	31.2	17.7	3.31
1200	80	62	37.2	33.7	2.10	35.9	33.2	2.33	34.6	32.2	2.56	33.1	30.5	2.82	31.3	30.8	3.09	29.4	29.1	3.38
	80	67	40.1	27.3	2.07	38.7	26.7	2.31	37.5	26.2	2.56	36.0	25.5	2.82	34.2	24.9	3.10	31.7	23.8	3.38
	80	72	42.5	21.3	2.04	41.5	20.9	2.29	40.2	20.5	2.55	38.8	19.9	2.82	36.9	19.2	3.10	34.2	18.0	3.39
	75	62	37.3	28.3	2.11	35.8	27.6	2.33	34.5	27.0	2.56	32.9	26.2	2.81	31.1	24.9	3.08	28.9	23.9	3.36
	75	67	39.9	22.0	2.08	38.7	21.4	2.32	37.4	20.9	2.56	35.7	20.1	2.82	34.0	19.4	3.10	31.6	18.4	3.38
1350	80	62	37.8	34.5	2.17	36.4	35.0	2.39	35.1	32.9	2.63	33.6	33.2	2.89	32.1	31.7	3.16	30.1	30.1	3.45
	80	67	40.6	28.7	2.14	39.2	28.1	2.38	37.9	27.4	2.63	36.4	27.0	2.89	34.5	26.2	3.17	32.0	25.0	3.45
	80	72	43.1	22.1	2.10	42.1	21.7	2.36	40.5	21.1	2.62	39.1	20.5	2.89	37.3	19.7	3.17	34.5	18.8	3.46
	75	62	37.8	29.6	2.17	36.4	29.1	2.39	34.8	28.4	2.63	33.3	27.6	2.88	31.5	26.4	3.15	29.2	25.2	3.43
	75	67	40.5	22.7	2.14	39.2	22.2	2.38	37.8	21.6	2.63	36.1	20.9	2.89	34.3	20.1	3.17	31.8	19.0	3.45

E.D.B. = Entering dry bulb
 E.W.B. = Entering wet bulb
 T.C. = Total Capacity
 S.C. = Sensible Capacity
 kW = Kilo Watts

COOLING EXPANDED RATINGS WITH COIL (CONTINUED)

FSA4BE5M1SN42K + C75B(A,H)MX3642(C,U)-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1225	80	62	43.6	37.4	2.48	41.8	36.5	2.68	40.2	35.8	2.93	38.4	35.0	3.21	36.5	33.8	3.52	34.2	32.7	3.85
	80	67	47.3	31.2	2.47	45.3	29.6	2.69	43.7	29.5	2.94	42.0	28.5	3.23	39.9	28.0	3.54	37.4	26.5	3.87
	80	72	50.8	24.8	2.46	49.0	24.1	2.68	47.4	23.5	2.94	45.5	22.7	3.22	43.3	21.9	3.54	40.5	20.9	3.87
	75	62	43.5	31.4	2.48	41.5	29.8	2.68	39.9	29.0	2.93	38.3	29.0	3.21	36.4	27.8	3.52	34.1	26.6	3.85
	75	67	47.1	25.4	2.47	45.3	24.6	2.69	43.6	23.9	2.94	41.8	23.1	3.22	39.7	22.1	3.54	37.2	21.1	3.87
1400	80	62	44.5	39.9	2.55	42.6	39.0	2.76	40.9	38.0	3.01	39.1	37.0	3.29	37.1	36.0	3.60	34.4	33.1	3.93
	80	67	48.3	33.0	2.55	46.2	31.1	2.76	44.6	30.9	3.02	42.7	30.4	3.30	40.5	29.4	3.62	37.9	28.0	3.95
	80	72	51.9	25.8	2.54	49.9	25.1	2.76	48.2	24.5	3.02	46.2	23.7	3.30	43.9	22.8	3.62	41.0	21.6	3.96
	75	62	44.2	32.2	2.55	42.3	31.2	2.76	40.6	30.4	3.01	38.9	30.6	3.29	37.0	29.7	3.60	34.6	28.6	3.93
	75	67	48.0	26.3	2.55	46.2	25.6	2.76	44.4	24.8	3.02	42.4	23.9	3.30	40.3	23.0	3.62	37.7	22.0	3.95
1575	80	62	45.0	39.6	2.63	43.2	40.0	2.84	41.4	40.1	3.09	39.7	39.0	3.37	37.8	37.7	3.68	35.8	35.8	4.01
	80	67	49.0	34.6	2.63	46.7	32.4	2.84	44.9	31.5	3.09	42.9	30.7	3.38	41.0	31.1	3.70	38.3	29.9	4.03
	80	72	52.6	26.6	2.62	50.6	26.0	2.84	48.8	25.3	3.09	46.7	24.5	3.38	44.4	23.6	3.70	41.4	22.5	4.04
	75	62	45.0	34.9	2.63	42.9	32.7	2.84	41.1	31.8	3.09	39.4	32.0	3.37	37.3	31.4	3.68	34.9	29.6	4.01
	75	67	48.8	27.3	2.63	46.8	26.4	2.84	44.9	25.6	3.09	42.9	24.8	3.38	40.7	23.9	3.70	38.0	22.8	4.03

FSA4BE5M1SN48K + C75B(A,H)MX4860(C,U)-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1500	80	62	49.4	43.3	2.85	47.8	42.6	3.11	46.1	41.7	3.42	44.1	39.6	3.80	41.9	39.6	4.21	39.6	38.4	4.68
	80	67	53.4	34.9	2.86	51.7	34.2	3.10	50.2	34.4	3.40	48.2	33.6	3.74	45.8	32.6	4.14	43.3	31.6	4.63
	80	72	59.0	28.9	2.89	57.1	28.2	3.14	54.8	27.3	3.42	52.4	26.4	3.76	50.0	25.5	4.15	47.3	24.3	4.61
	75	62	48.9	35.2	2.86	47.4	34.5	3.11	45.9	34.3	3.42	44.0	33.7	3.79	41.7	32.7	4.22	39.4	31.7	4.69
	75	67	53.6	29.1	2.86	51.9	28.3	3.10	50.0	27.5	3.39	47.9	26.6	3.74	45.7	25.7	4.14	43.2	24.7	4.62
1600	80	62	49.7	44.6	2.90	48.2	43.8	3.15	46.5	42.9	3.47	44.4	41.9	3.83	42.3	40.8	4.25	40.0	39.4	4.72
	80	67	54.3	36.9	2.90	52.1	34.9	3.15	50.3	34.2	3.44	48.5	34.5	3.78	46.2	33.5	4.19	43.6	32.5	4.67
	80	72	59.5	29.3	2.93	57.5	28.7	3.18	55.3	27.8	3.47	52.8	26.9	3.80	50.3	25.9	4.20	47.6	24.8	4.65
	75	62	49.6	37.2	2.90	47.8	35.1	3.15	46.3	35.5	3.47	44.2	34.6	3.83	42.1	33.7	4.26	39.3	30.9	4.73
	75	67	54.0	29.5	2.90	52.3	28.8	3.15	50.4	28.0	3.44	48.3	27.2	3.78	46.0	26.1	4.19	43.4	25.1	4.67
1800	80	62	50.5	46.8	2.99	48.9	45.1	3.24	47.1	45.3	3.55	45.1	44.2	3.91	43.0	42.7	4.33	41.0	41.0	4.80
	80	67	54.9	38.2	2.99	53.2	37.4	3.24	50.9	35.6	3.53	49.1	36.3	3.87	46.7	35.2	4.28	44.1	34.2	4.76
	80	72	60.3	30.2	3.02	58.4	29.7	3.27	56.0	28.8	3.56	53.5	27.8	3.89	50.8	26.8	4.29	48.0	25.8	4.74
	75	62	50.3	39.0	2.99	48.5	36.9	3.24	46.9	37.4	3.55	44.5	34.7	3.92	42.5	35.6	4.34	40.0	34.5	4.82
	75	67	54.8	30.6	2.99	53.0	29.8	3.24	51.1	29.1	3.53	48.9	28.1	3.87	46.5	27.1	4.27	43.9	25.9	4.75

E.D.B. = Entering dry bulb
 E.W.B. = Entering wet bulb
 T.C. = Total Capacity
 S.C. = Sensible Capacity
 kW = Kilo Watts

COOLING EXPANDED RATINGS WITH COIL (CONTINUED)

FSA4BE5M1SN60K + C75B(A,H)MX4860(C,U)-C

O.D.T		65°F			75°F			85°F			95°F			105°F			115°F			
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.									
1545	80	62	57.8	47.0	3.50	56.4	46.3	3.84	54.7	45.4	4.26	52.6	44.3	4.76	50.1	43.5	5.33	47.3	41.6	5.99
	80	67	62.7	39.9	3.52	61.1	39.3	3.86	59.2	38.4	4.26	56.9	37.4	4.73	54.5	36.3	5.28	51.7	35.0	5.90
	80	72	69.3	33.1	3.58	67.2	32.3	3.93	64.6	31.2	4.33	61.2	29.8	4.78	59.1	29.0	5.30	56.3	27.9	5.90
	75	62	57.6	40.2	3.50	56.3	39.6	3.84	54.6	38.8	4.26	52.4	37.6	4.75	50.0	36.6	5.33	47.2	35.2	5.98
	75	67	62.5	33.0	3.52	60.9	32.3	3.86	59.1	31.6	4.26	56.7	30.4	4.73	54.2	29.3	5.28	51.5	28.1	5.90
1875	80	62	59.6	50.8	3.65	58.1	50.7	4.00	56.3	49.8	4.42	54.0	48.1	4.92	51.4	47.6	5.48	48.5	46.3	6.12
	80	67	64.7	42.9	3.67	62.8	42.0	4.02	60.7	41.0	4.42	58.3	40.0	4.90	55.7	38.8	5.44	52.9	37.8	6.05
	80	72	71.4	34.8	3.73	69.0	33.9	4.08	66.4	33.0	4.49	63.5	31.8	4.95	60.5	30.6	5.46	57.1	29.3	6.05
	75	62	59.3	43.1	3.65	57.9	42.4	4.00	56.1	41.5	4.42	53.8	40.4	4.91	51.2	39.1	5.48	48.3	37.7	6.13
	75	67	64.4	34.8	3.67	62.5	34.0	4.02	60.5	33.1	4.42	58.2	32.2	4.90	55.5	31.0	5.43	52.7	29.8	6.05
2000	80	62	60.1	52.9	3.71	58.5	51.9	4.06	56.7	50.6	4.48	54.4	50.5	4.97	51.8	49.2	5.54	48.9	47.4	6.17
	80	67	65.2	43.9	3.73	63.4	43.2	4.08	61.2	42.0	4.48	58.7	41.0	4.96	56.1	39.8	5.50	53.2	38.5	6.11
	80	72	72.0	35.5	3.79	69.5	34.6	4.14	66.8	33.5	4.55	63.9	32.3	5.00	60.9	31.1	5.52	57.8	30.0	6.12
	75	62	59.8	44.1	3.71	58.4	43.4	4.06	56.5	42.5	4.48	54.2	41.3	4.97	51.6	40.1	5.54	48.6	38.7	6.19
	75	67	64.9	35.4	3.73	63.1	34.6	4.08	60.9	33.7	4.48	58.6	32.8	4.96	56.0	31.7	5.49	52.5	30.0	6.09

E.D.B. = Entering dry bulb

E.W.B. = Entering wet bulb

T.C. = Total Capacity

S.C. = Sensible Capacity

kW = Kilo Watts

GENERAL TERMS OF LIMITED WARRANTY

Nordyne, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nordyne, LLC warranty department for a copy.



DISCOVER Comfort

GET STARTED AT FRIGIDAIREHVAC.COM



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (10/24)

FRIGIDAIRE is a registered trademark of Electrolux Home Products Inc. and used under a license from Electrolux Home Products, Inc.

© Nordyne, LLC 2024. All Rights Reserved.

999F-1024

FRIGIDAIRE®

