

## WASHLET® S2 ELONGATED

### FEATURES

- High-tech electronic bidet seat
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Gentle aerated, warm water, front and rear spray with oscillating and pulsating features
- Adjustable spray position, water temperature, and water pressure
- Instantaneous water heater for continuous warm water and energy savings
- Warm air dryer with three variable temperature settings
- Automatic air deodorizer
- Convenient arm control panel
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- SoftClose® seat
- Docking station for easy cleaning and installation
- Night light illuminates the inside of the bowl
- Auto energy saver mode adjusts the seat temperature when inactive
- Compatible with most elongated toilets

### MODELS

- SW3346#01 - Cotton
- SW3346#12 - Sedona Beige

### COLORS/FINISHES

- #01 Cotton
- #12 Sedona Beige

### PRODUCT SPECIFICATION

Seat shall have gentle aerated, warm water, dual action spray with cycling movement and massage feature. Seat shall have adjustable water temperature and volume. Seat shall have warm air drying with three variable temperature settings. Seat shall have automatic air deodorizer. Seat shall include convenient arm control panel. Seat shall be solid plastic with closed front seat and cover. Seat shall include power cord, and water supply hoses. EWATER+ cleans the wand. Seat shall be model SW3346#\_\_\_\_.



### CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 #68 and back siphonage testing to ASSE 1001 and CSA B64.1.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements




### SPECIFICATIONS

|                                |                                                                                                                                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power Rating</b>            | AC 120 V, 60 Hz                                                                                                                          |
| <b>Power Consumption</b>       | 1273 W                                                                                                                                   |
| <b>Max Power Consumption</b>   | 1428 W                                                                                                                                   |
| <b>Power Cord Length</b>       | 3.9 ft (1.2m)                                                                                                                            |
| <b>Spray Volume</b>            | Rear Cleansing:<br>0.07 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.07 – 0.11 gal/min<br><br>Front Cleansing:<br>0.08 – 0.11 gal/min     |
| <b>Spray Features</b>          | Adjustable Surface Temp:<br>95°F - 104°F (35°C - 40°C)<br><br>Safety Device:<br>Temperature Fuse                                         |
| <b>Warm Air Dryer Features</b> | Adjustable Air Temp:<br>95°F - 140°F (35°C - 60°C)<br>Airflow Volume:<br>8.83 ft <sup>3</sup> /min<br>Safety Device:<br>Temperature Fuse |
| <b>Heated Seat Features</b>    | Adjustable Surface Temp:<br>82°F - 97°F (28°C - 36°C)<br><br>Safety Device:<br>Temperature Fuse                                          |
| <b>Water Supply Pressure</b>   | Minimum:<br>7.25 PSI (Flowing)<br><br>Maximum:<br>108.75 PSI (Static)                                                                    |
| <b>Ambient Temp.</b>           | 32°F - 104°F (0°C - 40°C)                                                                                                                |
| <b>Warranty</b>                | One Year Limited Warranty                                                                                                                |
| <b>Shipping Weight</b>         | SW3346:<br>16 lbs                                                                                                                        |
| <b>Shipping Dimensions</b>     | SW3346:<br>24-3/8" L x 21" W x 7-7/16" H                                                                                                 |

### INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.

### DIMENSIONS

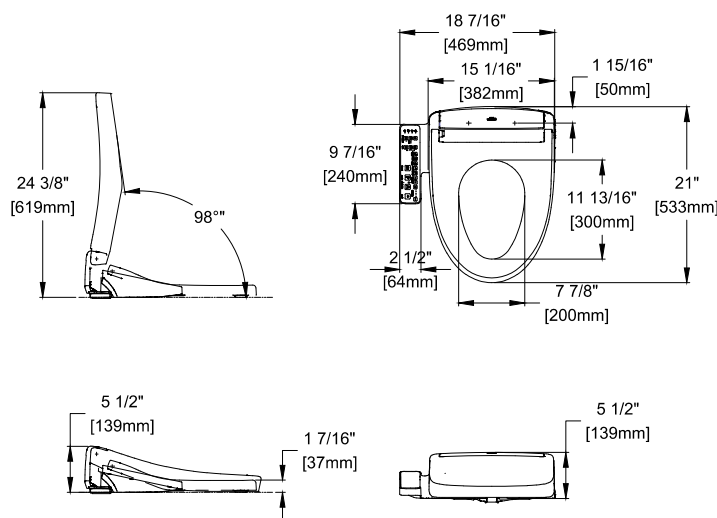

GFCI outlet of 120V, 15amps.  
Power cord is 4' long with 3 prongs.